




SERIES -ISO 7241 -A

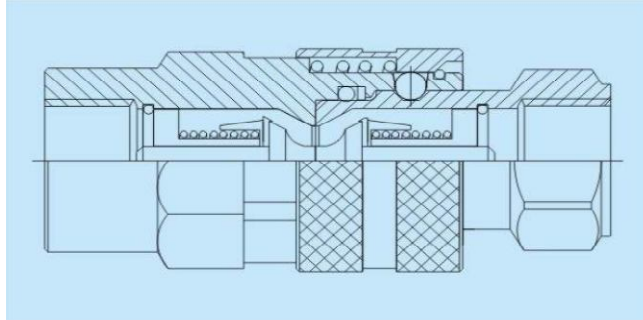

SPECIFICATIONS	
Size	1/4" to 2"
Working Pressure	Upto 350 Bar
Material	Carbon Steel / stainless Steel
Application	Agricultureal & Industrial

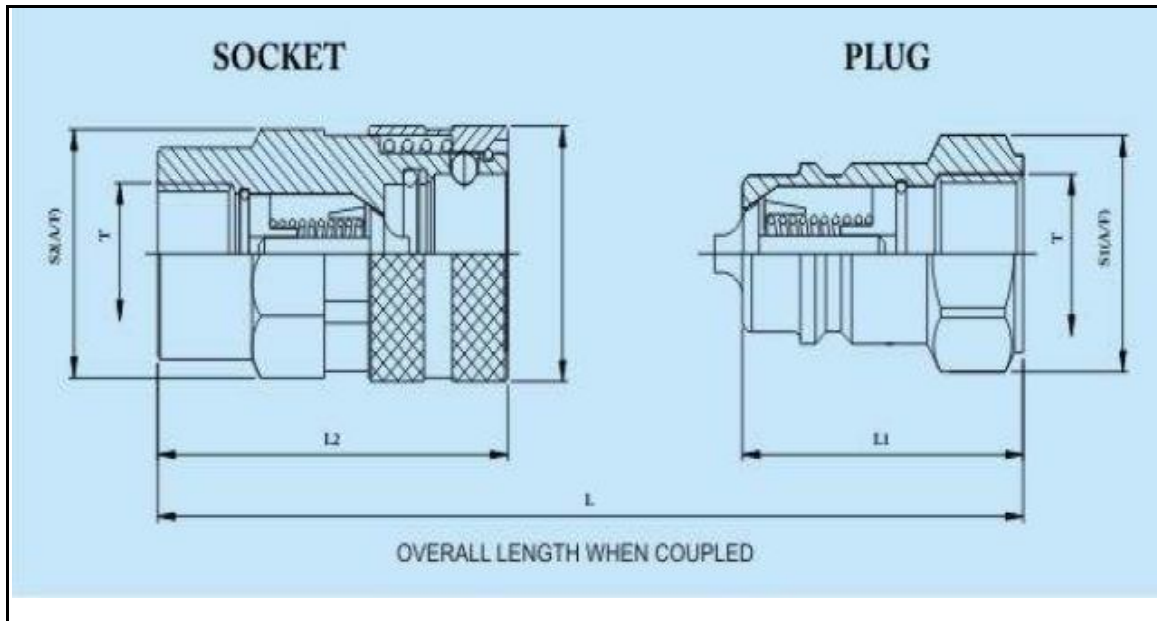

SR.No.	SIZE	L1	L2	S1	S2	D1	L
	BSP/NPT	MM	MM	MM	MM	MM	MM
1	1/4"	32.00	47.00	19.00	19.00	26.00	64.80
2	3/8"	38.00	56.00	22.00	27.00	31.00	76.40
3	1/2"	46.00	67.20	27.00	32.00	38.00	91.00
4	3/4"	55.00	82.00	36.00	38.00	48.00	109.40
5	1"	63.00	97.00	41.00	46.00	54.00	126.00

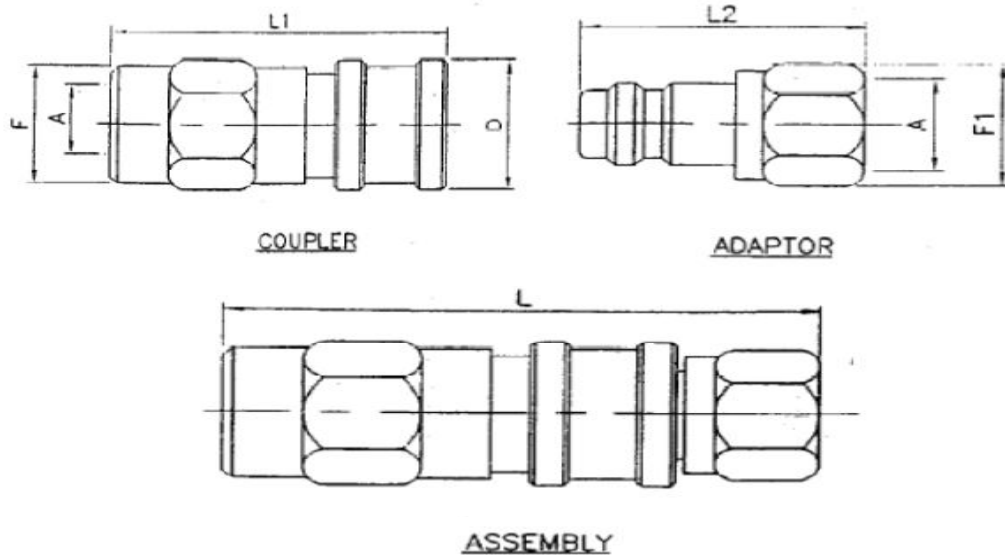


Size	Part No.	A	Dimensions in mm						W.P. PSI
			D	F	F1	L1	L2	L	
1/8"	QRC - V1	1/8"BSP	19	16	14	41	27	54	500
1/4"	QRC - V2	1/4"BSP	24	21	19	53	33	70	500
3/8"	QRC - V3	3/8"BSP	24	24	22	55	35	73	500
1/2"	QRC - V4	1/2"BSP	34	28	28	58	42	89	500
3/4"	QRC - V5	3/4"BSP	40	35	32	83	45	107	500
1"	QRC - V6	1"BSP	42	50	40	84	50	111	500
1 1/4"	QRC - V7	1 1/4"BSP	49	50	50	89	54	120	500

NB :- TYPE - V COUPLING IS WITH SELF SEALING VALVE AT COUPLER END AND THROUGH ADPTOR

INBULD CHECK VALVE IN COUPLER SIDE ONLY & ADAPTOR SIDE THROUGH TYPE

SEALING INSIDE - NBR RING



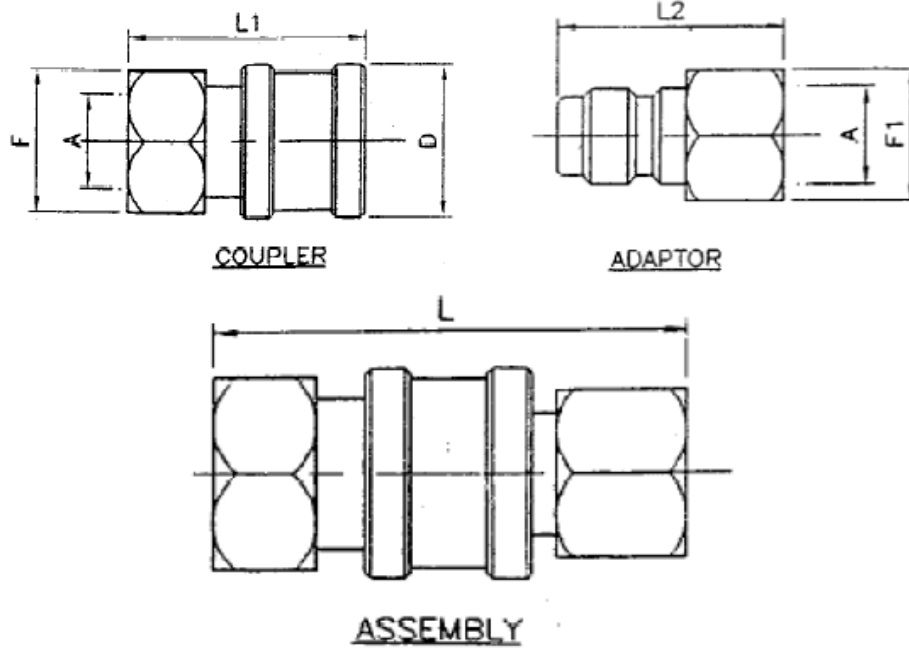

Size	Part No.	A	Dimensions in mm						W.P. PSI
			D	F	F1	L1	L2	L	
1/8"	QRC - T1	1/8"BSP	18	14	14	31	32	47	500
1/4"	QRC - T2	1/4"BSP	28	22	19	39	40	57	500
3/8"	QRC - T3	3/8"BSP	32	25	22	41	42	60	500
1/2"	QRC - T4	1/2"BSP	35	28	28	44	47	66	500
3/4"	QRC - T5	3/4"BSP	42	40	32	54	52	78	500
1"	QRC - T6	1"BSP	50	45	40	57	60	85	500
1 1/4"	QRC - T7	1 1/4"BSP	60	55	50	62	65	93	500
1 1/2"	QRC - T8	1 1/2"BSP	70	57	57	66	68	97	500
2"	QRC - T9	2"BSP	88	72	69	77	78	110	500

NB :- TYPE - T COUPLING (WITHOUT VALVE) THROUGH TYPE


NO CHECK VALVE IN COUPLER OR ADAPTOR SIDE

SEALING INSIDE - NBR RING

QUICK RELEASE COUPLING

VE-LOCK

AS PER ISO 7241 TYPE - B

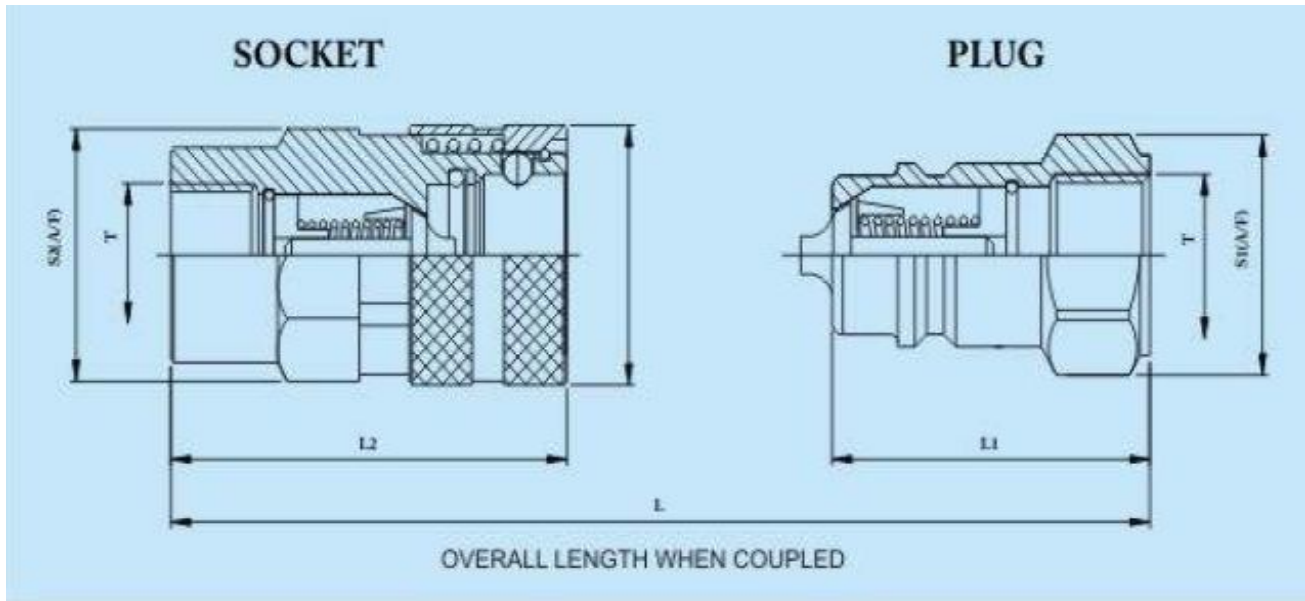

SIZE	VE-LOCK Item	End	DIAMENSIONS IN MM				W.P. = BAR
			L1	L2	L	D	
T	Code	Connection	L1	L2	L	D	W.P. = BAR
1/8"	VE DC 1/8"	Bsp (F) X(F)	44	33	58	23	300
1/4"	VE DC 1/4"	Bsp (F) X(F)	58	40	72	32	300
3/8"	VE DC 3/8"	Bsp (F) X(F)	66	45	80	38	300
1/2"	VE DC 1/2 "	Bsp (F) X(F)	71	50	90	44	250
3/4"	VE DC 3/4 "	Bsp (F) X(F)	77	55	98	48	200
1"	VE DC 1"	Bsp (F) X(F)	85	63	112	58	150
1 1/4"	VE DC 1.25 "	Bsp (F) X(F)	94	65	120	72	150
1 1/2"	VE DC 1.5"	Bsp (F) X(F)	113	80	144	89	150
2"	VE DC 2 "	Bsp (F) X(F)	127	88	152	105	100
2 1/2"	VE DC 2.5 "	Bsp (F) X(F)	132	94	158	118	100
3"	VE DC 3 "	Bsp (F) X(F)	140	103	180	127	100

INBUILT CHECK VALVE IN SOCKET (COUPLER) + PLUG (ADAPTOR) BOTH SIDE

SEALING INSIDE - NBR RING

VE-LOCK